



Belfast Privacy Lattice Top Fence (6x6) Installation Instructions For LBP8615A & LBP8615B

LBP8615A-Lattice Top Pre-assembled, Bottom Rail and 2 Brackets for Middle Rail.

*Additional 4 Brackets is included in LBP8602 Vinyl Fence Post.

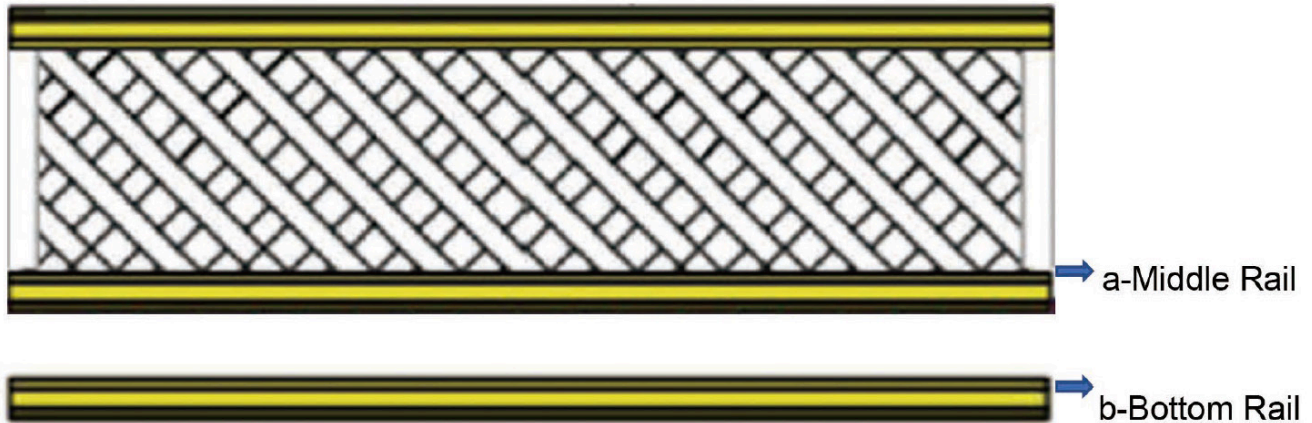

LBP8615B-9 Panels

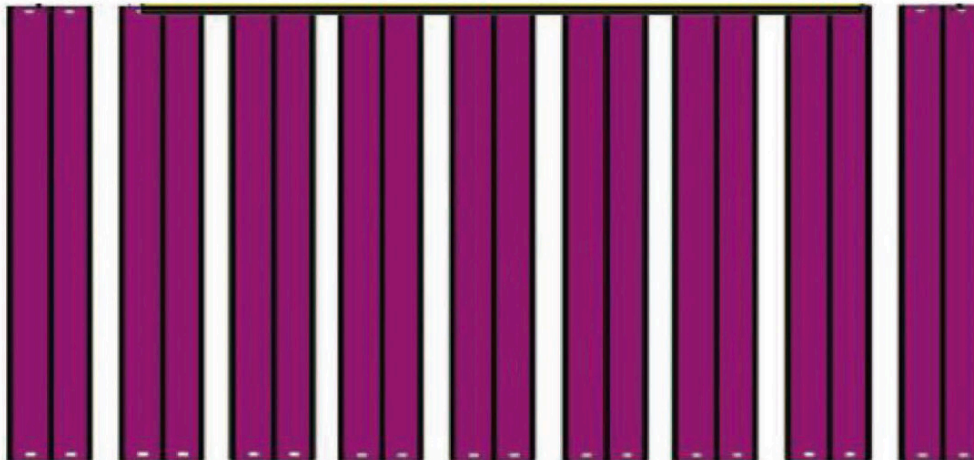

Connecting LBP8615A with LBP8615B

1. Insert the 9 pieces of panels into Part a (Middle Rail)'s bottom notch and Part B (Bottom Rail)'s top notch orderly. Check the panels' connection and make sure they are locked tightly.
2. Install the two brackets for Middle Rail on each end by using the attached screws.
3. This assembled Lattice top fence panel is ready for use now.

Must be used with LBP8602 Post Kit White (Sold Separately)

Belfast Privacy Lattice Top Fence (6 x 6) Installation Instructions

For SKU# LBP8615

Required:

- Philips Screwdriver
- Measuring Tape
- String Line, Stakes, Level
- PVC Vinyl Cement

Optional:

- Power Drill with 1/8" Drill Bit
- Post Hole Digger
- Power Auger
- Safety Glasses
- Concrete or Gravel

Installation Tips:

- Prior to construction, check with your regulatory agency for local code requirements
- Contact your utility company to locate and mark underground lines
- Careful planning and measurement of your fence project is essential, as moving posts after the concrete sets is extremely difficult
- It is highly recommended to measure the panels prior to setting your posts, not all panels are the same width (+/- 3/16")



Planning is Essential

- Consider soil conditions, slopes, utility locations and property lines when positioning posts.
- Run a string line to locate the fence line and establish the outside faces of your posts (See Fig 1.)
- Mark the centers of the post locations for your fence. THE MAXIMUM DISTANCE BETWEEN FENCE RAIL POSTS IS 72"

Included in kit:

Item	Product Name	Size	Qty
A	4" x 4" Vinyl Post	4" x 4" x 96"	1
B	4" x 4" Post Cap	4" x 4"	1
C	Rail Bracket		6
D	Screw	Length 3/4"	48
E	Fence Panel*	7-3/4" x 7/8" x 49-11/64"	9
F	Rail*	3" x 1-1/2" x 67-6/32"	3
G	Lattice	1/2" x 13-26/32" x 65-33/64"	1
H	U channel for lattice	39/64" x 1-1/2" x 29-33/64"	2

*These components are pre-assembled

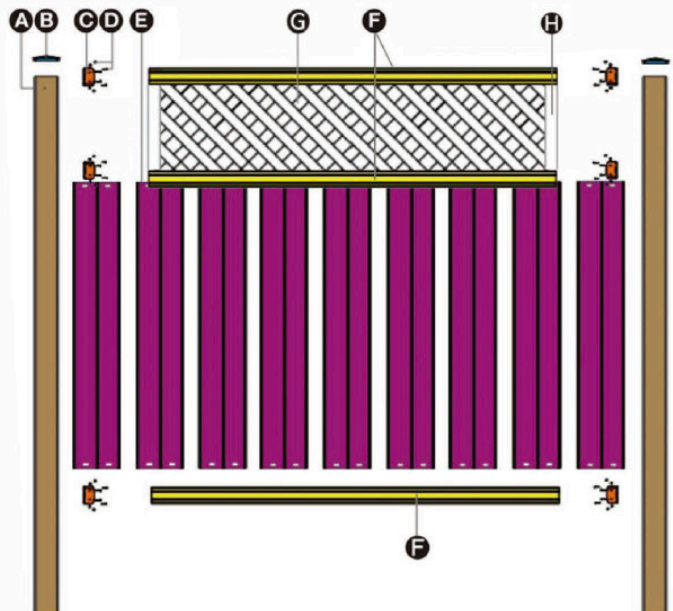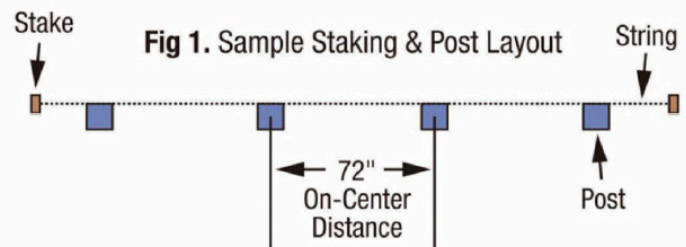

Setting Posts

1. Dig or auger post holes. The 4" x 4" Vinyl Posts require a **10" DIAMETER HOLE**, and must be at least **30" BELOW GRADE**. (See Fig 2.)

In frost regions, the post holes should be deep enough to extend below the frost line.

2. Mix concrete according to manufacturer's specifications. Fill the bottom of the hole to a level 24" from the surface.
3. Set the post into the hole, be sure it is square and in-line with your string layout.
4. Pour concrete around the post approximately 6" at a time. Tamp to eliminate air pockets, and continually check for level.
5. Before the concrete sets, sight down the fence line to be sure all posts align, and are at the same height. High posts can be driven deeper by placing a wooden block across the top and tapping down with a hammer. Allow concrete to set 24-48 hours.

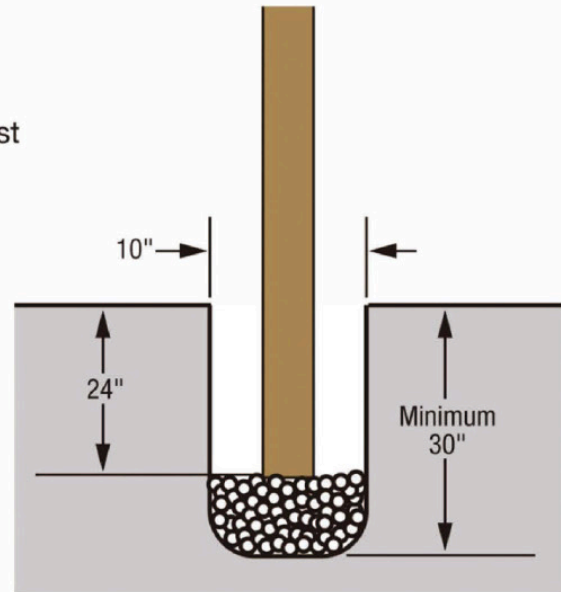


Fig 2. Setting Posts

Installing Fence Panel

1. Measure the distance between posts. If necessary, use a hack saw to cut Top and Bottom Rails (F) to fit. Be sure to cut equally from either end.
2. Use screws (D) to fasten Rail Bracket (C) to Top & Bottom Rails (F). (See Fig 3.)
3. Position the fence assembly between the posts. Align with adjacent fence panels or with the Top Rail slightly below the top of the vinyl posts. Screw all Rail Brackets (C) to the Vinyl Posts (A) using Screws (D). (See Fig 4.)
4. Affix the Post Cap (B) using PVC glue.


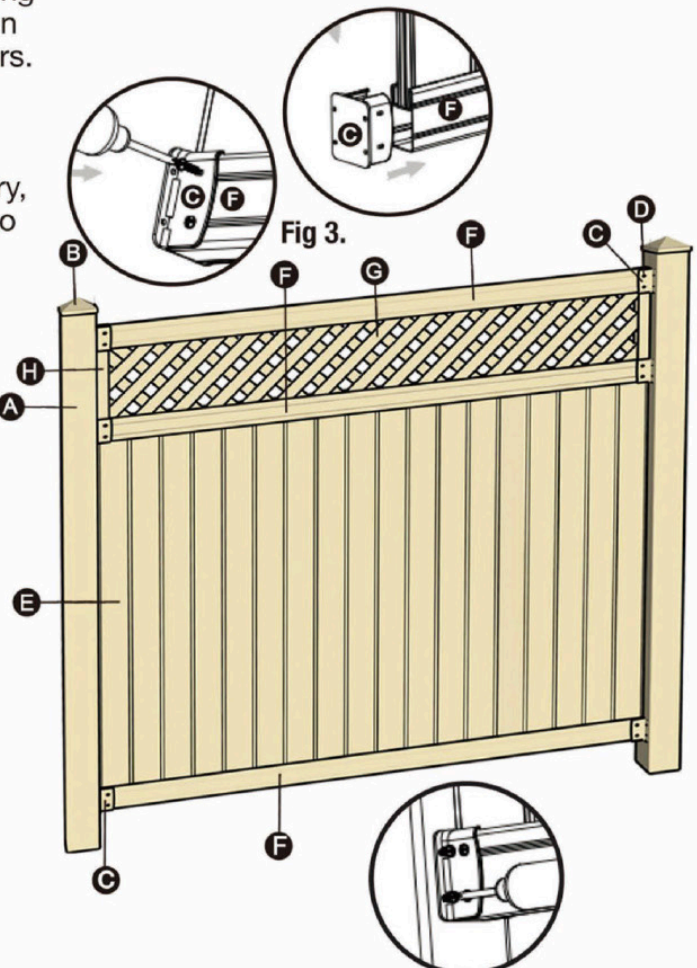


Fig 4.

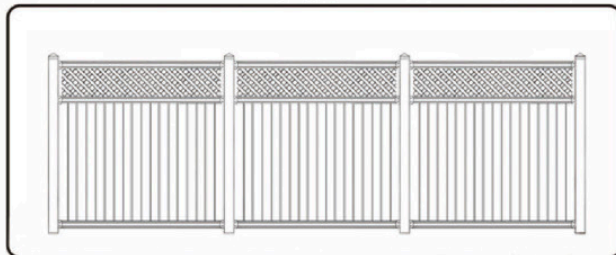

NOTE: This fence type is designed to be installed level between posts - it does not angle to follow slopes.

Use of this product must be in accordance with all local & zoning and/or building codes.
Consumer assumes all risks and liability associated with the use of this product.
For warranty details see the express written limited warranty for your product.